
IOTA Engineering Co.

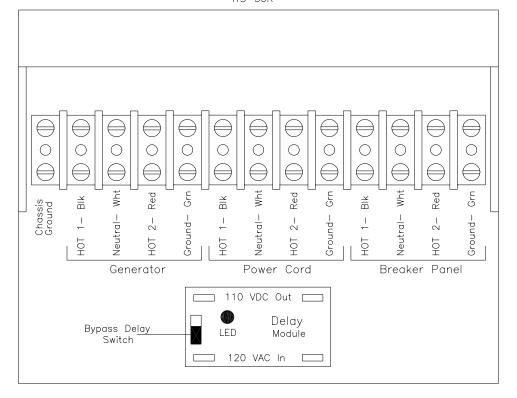

Note:
This unit defaults to the Power Cord.
Once Generator is sensed there is a delay of 20 to 30 seconds before transferring.
The LED Indicator lights to show normal operation.

Fasteners must be Torqued as follows: All Wire Screws— 45 in. lbs.

THIS DOCUMENT IS THE SOLE PROPERTY OF GULF STREAM COACH, INC. UNAUTHORIZED USE, DISCLOSURE, OR DISSEMINATION OF INFORMATION CONTAINED HEREIN IS STRICTLY PROHIBITED. THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION, TRADE SECRETS, AND PROPRIETARY INFORMATION AND ANY UNAUTHORIZED USE OR POSSESSION OF THIS DOCUMENT WILL WARRANT PROSECUTION. COPYRIGHT GULF STREAM COACH, INC.

NO.	REVISION	DA TE	LAST ISSUED	
*	*	*	*	
*	*	*	*	SE
*	*	*	*	LEA
*	* *	*	*	REI
*	*	*	*	[-]
*	*	*	*	URRENT
*	*	*	*	18
*	* *	*	*	5
*	*	*	*	
*	* *	*	*	

		А	.11 5	0 Am	р	Ser	vices	S	
NOT PRI	NTED	TO	SCALE	APPRO	VED	BY	DRAWN	BY:	TS
DATE:	11/	13/0	03				P	AGE 1	0F 1
	50	А	Tra	nsfer	S	witc	h-	IOTA	4
	DAT.	E &	TIME	PRINTED			DRA	WING	NUMBEI

AE 2208

02/13/2001 @ 09:18:12